




BASE - Bygges etter kundens krav

- FULL AV FUNKSJONER OG EN MENGDE TILPASSINGER
- LEVERES MED ELLER UTEN FORSTREKKSAGGREGAT

TECHNICAL DATA

Høyde	2466 mm
Bredde	1650mm
Lengde	2380 mm
Rotasjonsplate høyde	86 mm
Vekt	400 kg
Strømforsyning	230 VAC
Effekt	1 kW

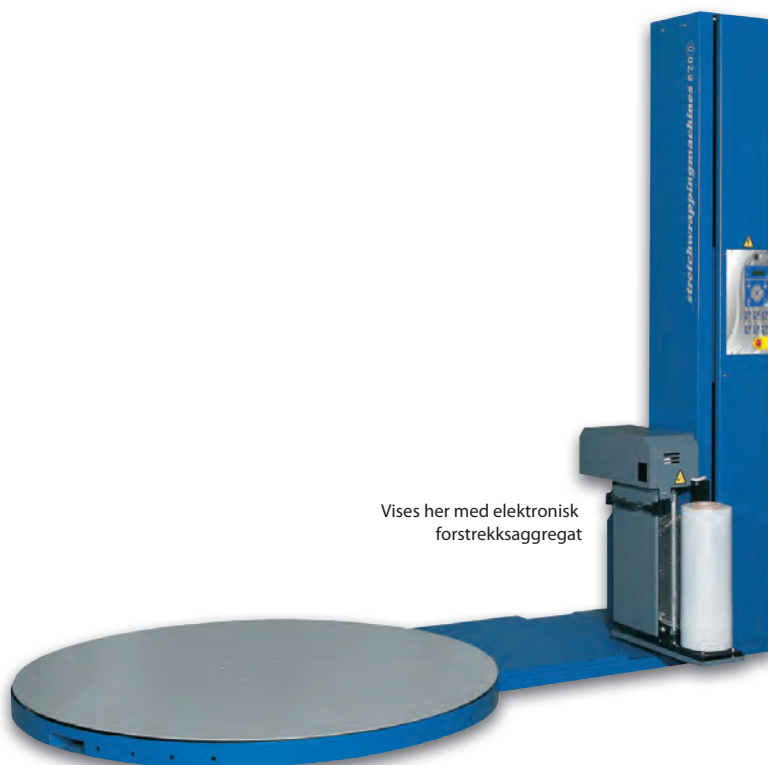


The main advantage of this machine is to offer top-level functions and features at a great price.

It has everything is needed: inverter for rotation motor, inverter for carriage motor, carriage with electro-magnetical clutch or power pre-stretch system, a wide range of options and programmes to meet every requirement. In the design process every detail has been carefully conceived to be rational: weight, dimensions, materials, electronics, wiring, assembly and transport.

The result is C-One Base: those who believe that low prices and quality can not be found in the same machine will be proven wrong.


THE PERFECT WRAPPING

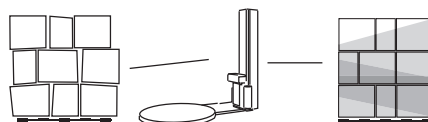



BASE

PRODUCT SPECIFICATIONS



- Electronic printed circuit board for the management of the cycle
- Frequency controller for carriage speed adjustment
- Frequency controller for turntable speed adjustment
- Loading plate \varnothing 1500 mm
- Maximum height of pallet: 2200 mm
- Maximum size of the pallet: 800x1200 mm
- Maximum loading weight: 1200 kg
- Electromagnetic brake for the stretching of the film
- Photocell for pallet height detection
- Safety stop at the base of the carriage
- Stop at 0 position
- Power board IP54
- 3 password levels (including lock password)
- Adjustable parameters by the control panel without password:
 - cycle selection, bottom laps, top laps, topsheet cycle
- Parameters, rotation speed, carriage ascent speed, carriage descent speed, film tension, starting wrapping height
- 6 working cycles: ascent/descent; topsheet; only ascent; only descent; layers; stack
- Storage of 32 end user programs
- 3 working ways: semimanual, semiautomatic, fixed height
- Strengthening operation
- Acoustic warning at the cycle start and stop
- Autodiagnostic
- Wrapped pallet counter
- Receiver for infrared/radio remote control
- Powder coating
- Braked turntable at the end of the cycle

MAIN OPTIONS

Top-press
 Power pre-stretch
 Adjustable power pre-stretch
 Power pre-stretch with auto cut-off system
 Roping system
 3000mm max wrapping height
 1650mm turntable
 1800mm turntable
 2000kg max pallet weight
 Remote control

Ramp
 Pit frame
 Photocell for dark loads
 Clip to tie the film to the turntable
 Weighing system
 Mechanical system to brake roll containers
 Feet under the machine
 Safety fences

www.PALLEVIKLER.no

INVENTECH AS
 Fjellhamarveien 52, 1472 FJELLHAMAR
 TLF: 22382800
post@inventech.no

