

ELEVAH® 75 Tires

TECHNICAL DATA

| | | |
|------------------------------------|--------------------------------------|---------------------|
| Max. working height | | 7,57 m |
| Max capacity | | 250 kg |
| Number of people | | 1 |
| Use | | Internal - esternal |
| A | Closed machine height | 1980 mm |
| B | Minimum platform height | 415 mm |
| C | Maximum platform height | 5575 mm |
| D/E | Base overall dimensions | 2080 x 780 mm |
| F/G | Cage dimensions | 630 x 780 mm |
| Machine weight | | 1015 kg |
| H/I | Fixed picking tray dimensions | 460 x 760 mm |
| Fixed picking tray capacity | | 20 kg |
| Drive wheels dimension | | Ø 220 x 48 |
| Swivel wheels dimensions | | Ø 200 x 40 |

TIRES TOOL






| | | |
|---|------------------------|--------------|
| Adjustment | | electric |
| O | Height | 555 mm |
| K/L | Fork dimensions | 600 x 555 mm |
| J | Stroke | 940 mm |
| Min. height from the ground | | 40 mm |
| Maximum height from the ground | | 5200 mm |
| Turning angle Max | | 90° |
| Maximum height from the ground (with rotated tool) | | 6595 mm |
| Capacity | | 150 kg |

PERFORMANCE



| | | |
|---|---|--------------------------|
| Power supply | | electric |
| Batteries | | 2 Pb Acido 12V 105 Ah |
| Battery charger | | 110V - 220V |
| M | Maximum climbing ability | 15% |
| Climbing ability at height | | 2,5% |
| Internal turning radius | | 0 |
| External turning radius | | 1025 mm |
| Max. speed (rising - descending) | | 0,2 m/s |
| Maximum shifting speed (on the ground - at height) | | 1,00 - 0,22 m/s |
| N | Maximum pressure for wheel at full load* | 4 kN |
| Work cycles ** (with fresh batteries) | | Ca. 130 |

* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).


** By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.

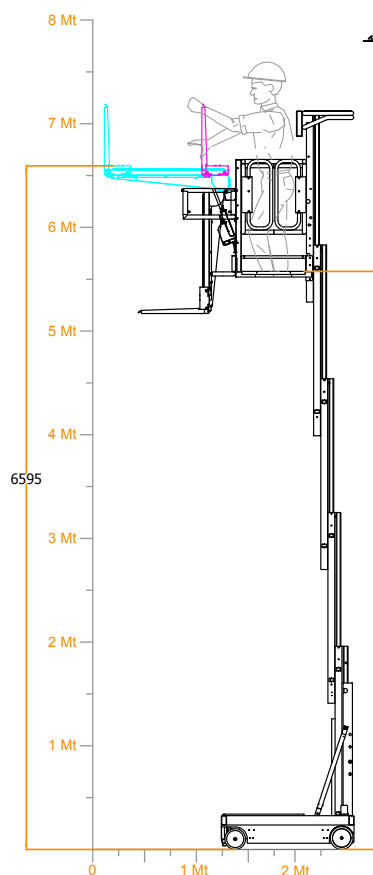

ELEVAH® 75 Tires

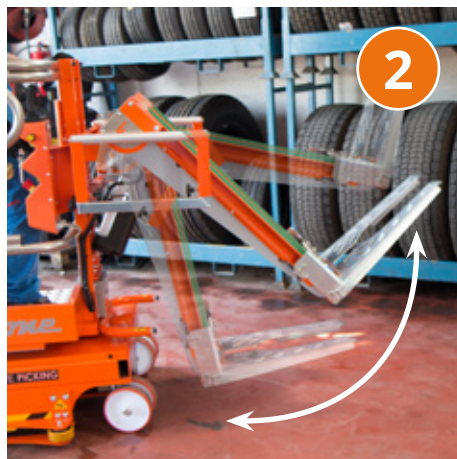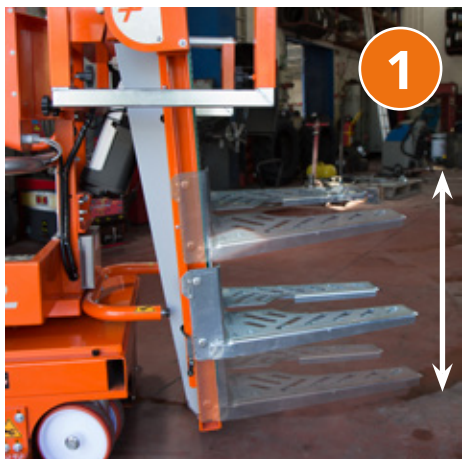

Standard: Tyres storage system with single adjustment (stroke). Optional: double adjustment (stroke/slope)

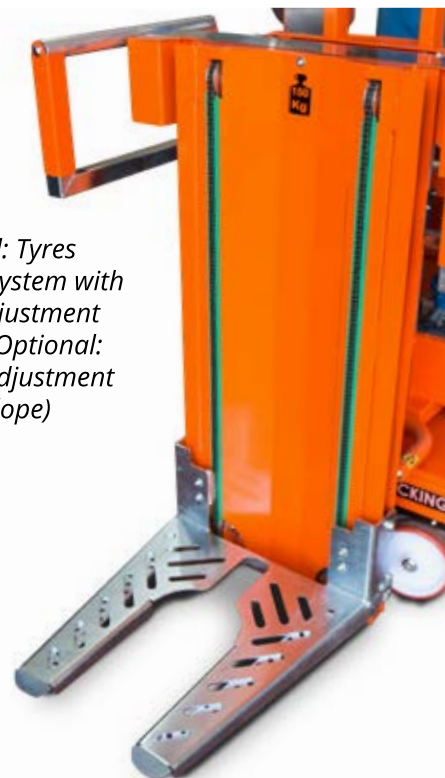

Side tool rollers with adjustable height and adjustable width to make storage operations easier.



OPTIONAL: possibility of adding an arm with lifting ropes for stowing tyres flat. It helps to move the tyres from the tool to the shelf without lifting it. The operator doesn't make any effort and always keeps the correct position

OPTIONAL: Side Roller

